

Description

Wall-mounted cabinets are designed to save floor space while providing an economical way to protect network equipment from dust, unauthorized tampering, and other potential hazards. They feature excellent cable management capabilities, and come with fully adjustable mounting rail systems suitable for a variety of applications. Depending on the specific usage scenario, PROSE offers split-type wall-mounted cabinets with a weight capacity of 60kg to meet customers' varying needs in terms of cost, space utilization.

Product Appearance




Key Features

- Provide a variety of wall-mounted cabinet sizes and components, flexible configuration according to different requirements.
- Multiple wiring channels at upper, lower and rear to facilitate on-site wiring.
- There are a variety of wall mounting methods for rotation, convenient operation.
- Built-in side door, tool free installation and disassembly, optional lock anti-disassembly design.
- The front door can be quickly disassembled without tools and can be exchanged between left and right.
- The opening Angle is 180°, which is convenient for equipment installation and maintenance.
- The cabinet is equipped with grounding copper nails in many places to facilitate equipment grounding.
- Optional casters or adjustable feet, used to fix on the ground.
- Electrostatic spray in line with European RoHS environmental standards.


Wall-mounted Cabinet Structure

Glass door structure

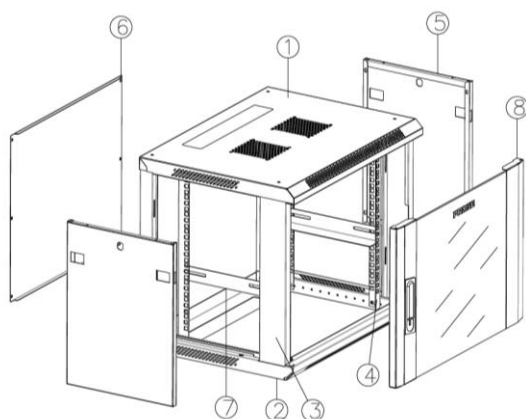

- ① Top Panel
- ② Bottom Panel
- ③ Frame
- ④ Mounting Rails
- ⑤ Side Panel
- ⑥ Rear Panel
- ⑦ Guide Rails
- ⑧ Front Door (Glass)

Mesh door structure

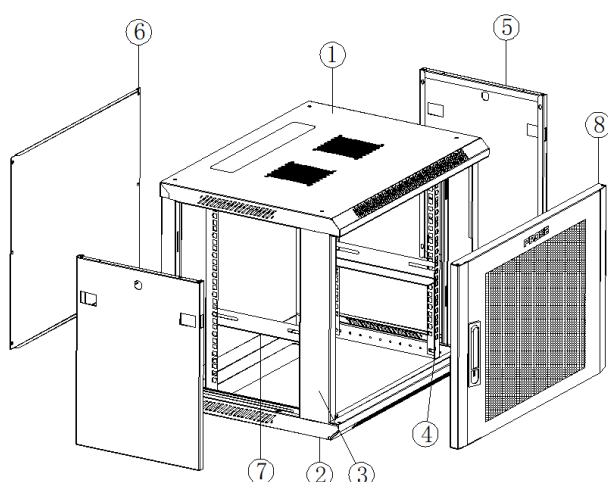

- ① Top Panel
- ② Bottom Panel
- ③ Frame
- ④ Mounting Rails
- ⑤ Side panel
- ⑥ Rear Panel
- ⑦ Guide Rails
- ⑧ Front Door Mesh

Main Specifications

1. Rack Unit Mechanical specifications

Item	Wall-mounted cabinet
Maximum static load capacity	60kg
Surface Finish	Powder Coated Black
Standard	ANSI/EIA RS-310-D/IEC297-2/ DIN41494;PART1 & DIN41494;PART7 /ETSI /GB/T3047.2-92/ ASTM D 1037 /ANSI A208.1 &ANSI A208.2, UL2416, UL60950, IEC60297-2,RoHS, REACH
Structure	Detachable / Welded integral type
Upright (Vertical Post)	1.5mm SPCC steel
Crossbeam (Horizontal Beam)	0.8mm SPCC steel
Frame	0.8mm SPCC steel
Front Door	0.8mm SPCC steel
Side Door	0.6mm SPCC steel
Top cover	0.8mm SPCC steel
Base plate	0.8mm SPCC steel
Fan	None,2pcs optional, AC220V
Cable Entry	Brush Panel on top & bottom cable Entry
Accessories	Screws and Nuts: 30set; Installation tool: 1set
Protection	IP20

2. Rack Unit Dimensions specifications

Item	Height(U)	Width(mm)	Depth(mm)	Height(mm)
1	4	600	450	280
2			600	
3	6	600	450	370
4			600	
5	9	600	450	503

6			600	
7	12	600	450	637
8			600	
9	15	600	450	770
10			600	
11	18	600	450	903
12			600	

Note: Size and capacity can be customized

Name Coding


WR60 - XX X XX - XXX - X X - X X XX
 1 2 3 4 5 6 7 8 9

Category	1: Height	2: Width	3: Depth	4: Front Door
WR60:WR60 series With 2pcs fans (AC220V)	04:4U 06:6U 09:9U 12:12U 15:15U 18:18U	6: 600mm 8: 800mm	45: 450mm 50: 500mm 55: 550mm 60: 600mm	000: None SSR: Single & Steel & Round lock SGR: Single & Glass & Round lock SMR: Single & Mesh & Round lock SSH: Single & Steel & Handle Lock SGH: Single & Glass & Handle Lock SMH: Single & Mesh & Handle Lock
5: Side Door	6: PDU	7: Color	8: Packaging	9: Accessory
0: None 1: Toolless & without lock 2: Screw fixed 3: Toolless & Round lock	0: None 1:6port UK13A with rocker switch 2:6port EU10A with rocker switch 3:6port Indian type D 16A rocker switch 4:6port New GB10A with rocker switch 5:6port Universal 13A with rocker switch 6:6port C13 with rocker switch 7:6port C19 with rocker switch 8:6port NEMA16A with rocker switch 9: 12port H Universal 13A rocker switch	B: RAL9005(Black) G: RAL7035(Grey)	D: Detachable L: Integral	00: None 01: 1*Fixed Tray 02: 1 pair*Guide Rail (2pcs) 03: 1*Fixed Tray+1*sliding Tray 04: 2*Fixed Tray 05: 1*Sliding Tray CX:C is customized, X is followed by the customization serial number

Ordering Information

No.	PN	Description
1	WR60-06660-SGH-11-BD00	WR60,6U,600W*600D, Detachable, Glass handle lock/Toolless w/o lock,1PDU,6UK port with Cable
2	WR60-09660-SGH-11-BD00	WR60,9U,600W*600D, Detachable, Glass handle lock/Toolless w/o lock,1PDU,6UK port with Cable
3	WR60-12660-SGH-11-BD00	WR60,12U,600W*600D, Detachable, Glass handle lock/Toolless w/o lock,1PDU,6UK port with Cable
4	WR60-15660-SGH-11-BD00	WR60,15U,600W*600D, Detachable, Glass handle lock/Toolless w/o lock,1PDU,6UK port with Cable
5	WR60-18660-SGH-11-BD00	WR60,18U,600W*600D, Detachable, Glass handle lock/Toolless w/o lock,1PDU,6UK port with Cable
6	WR60-06660-SGR-13-BD00	WR60,6U,600W*600D, Detachable, Glass round lock/Toolless RD lock,1PDU,6UK port with Cable
7	WR60-09660-SGR-13-BD00	WR60,9U,600W*600D, Detachable, Glass round lock/Toolless RD lock,1PDU,6UK port with Cable
8	WR60-12660-SGR-13-BD00	WR60,12U,600W*600D, Detachable, Glass round lock/Toolless RD lock,1PDU,6UK port with Cable
9	WR60-15660-SGR-13-BD00	WR60,15U,600W*600D, Detachable, Glass round lock/Toolless RD lock,1PDU,6UK port with Cable
10	WR60-18660-SGR-13-BD00	WR60,18U,600W*600D, Detachable, Glass round lock/Toolless RD lock,1PDU,6UK port with Cable
11	WR60-06660-SMH-13-BD00	WR60,6U,600W*600D, Detachable, Mesh handle lock/Toolless RD lock,1PDU,6UK port with Cable
12	WR60-09660-SMH-13-BD00	WR60,9U,600W*600D, Detachable, Mesh handle lock/Toolless RD lock,1PDU,6UK port with Cable
13	WR60-12660-SMH-13-BD00	WR60,12U,600W*600D, Detachable, Mesh handle lock/Toolless RD lock,1PDU,6UK port with Cable
14	WR60-15660-SMH-13-BD00	WR60,15U,600W*600D, Detachable, Mesh handle lock/Toolless RD lock,1PDU,6UK port with Cable
15	WR60-18660-SMH-13-BD00	WR60,18U,600W*600D, Detachable, Mesh handle lock/Toolless RD lock,1PDU,6UK port with Cable

GLOBAL FOOTPRINT

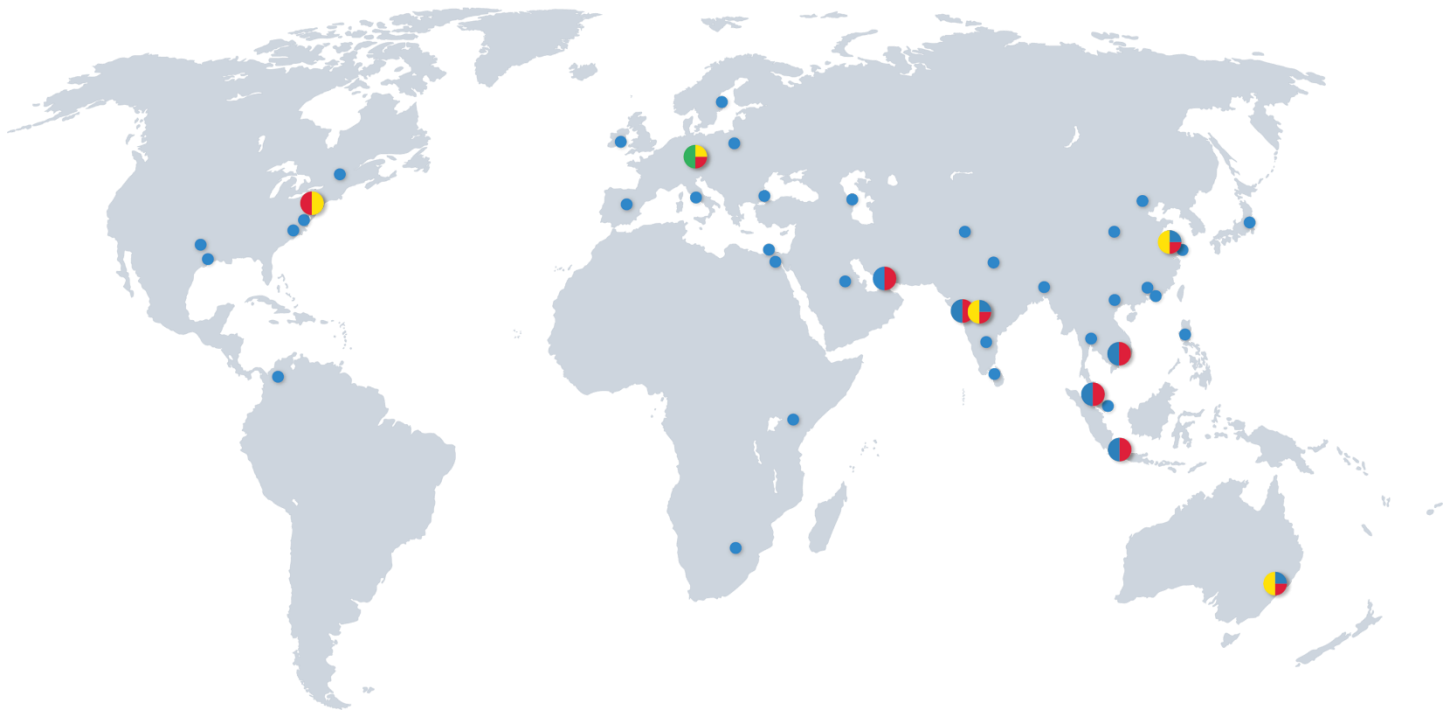

- HQ
- PRODUCTION / OPERATIONAL HUB
- R&D / ENGINEERING
- SUBSIDIARIES / SALES REPRESENTATIVES

PROSE

PROSE Technologies

www.ProseTechnologies.com
info@ProseTechnologies.com
© 2026 PROSE Technologies
04/26



For more information
refer to our website